Earthing Relay

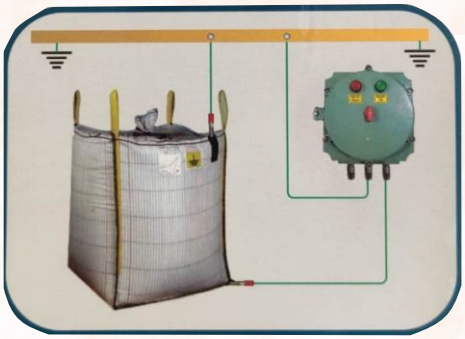

MODEL : ECR - 1

for FIBC C type bag

Application

To safety remove static electricity from type C FIBC and eliminate the risk of uncontrolled frictional static spark discharges.
Device continuously monitors the static dissipative path through the bag's conductive filaments, via a verified earth grounding point.

Technical Specification

Range	Earth Monitoring Loop Resistance 0 to 10M / 0 to 1M Ohms (0 to 10 Ohms adjustable).
Indication	Green LED Indicating successful grounding (EARTH OK) Red LED for POWER ON or EARTH OPEN
Output	Two Relay Change over 250V/5A (Resistive Load)
Power Supply	230 V AC , 50 Hz (± 10 %)
Set Comprising of...	Earthing Relay in FLP Enclosure with SS Clamp having 5 meter cable - 02 Nos.

Description	Cat. No.	Unit Rate [Rs.]
ECR -1 for FIBC C Type bag	ECR -1 (C Type Bag)	On Request

Note : For Other Approval or Certification - Price on Request

HSN Code : 8536 **GST** : 18% Exclusive

GG Excel

Cameosys Pvt. Ltd.
Email:cameosys11@gmail.com
cameosys21@gmail.com
Mobile : +91 99790 41111